

SCHOTT


# Tubular glass photobioreactors

Enabling efficiency

## Where others say no, we say yes.

Because at SCHOTT we believe that shared responsibility can release the energy to achieve the impossible. As a global material technology group, we are constantly exploring unique and innovative ways to make a difference for businesses and people. Being a foundation company, SCHOTT has anchored responsibility, scientific research, society and the environment deeply in its DNA. Represented in over 30 countries by 17,400 employees, we are a highly skilled partner for many high-tech industries. Whatever challenges the future might hold, we can't wait to come up with innovative solutions and turn visions into reality.

With a production capacity of round about 230,000 tons and production sites in Europe, South America and Asia, SCHOTT Tubing is one of the world's leading manufacturers of glass tubes, rods and profiles. More than 60 different glass types are produced in a large variety of dimensional and cosmetic specifications based on a standardized production process and a global quality assurance system. SCHOTT Tubing provides customized products and services for international growth markets such as pharmaceuticals and electronics as well as industrial and environmental engineering.

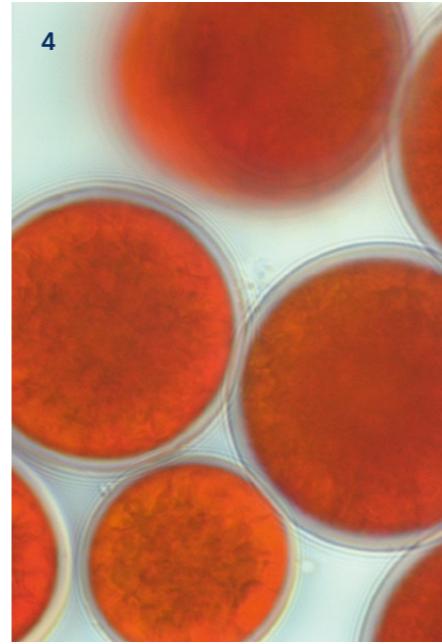


## Contents

Algae production systems	4
Crystal clear benefits	5
Product range	6
Borosilicate glass tubing	7
Borosilicate U-bends	8
Borosilicate glass manifolds	9
Packaging	12
Borosilicate glass properties	13
Pressure drop in tubular photobioreactors	15
Features and benefits	16
Closed tubular photobioreactors versus open ponds	16
Borosilicate glass versus polymer materials	17
References of glass tubular photobioreactors	18

# Algae production systems

Common photosynthetic algae cultivation systems are either open ponds or **closed photobioreactors (PBRs)**.

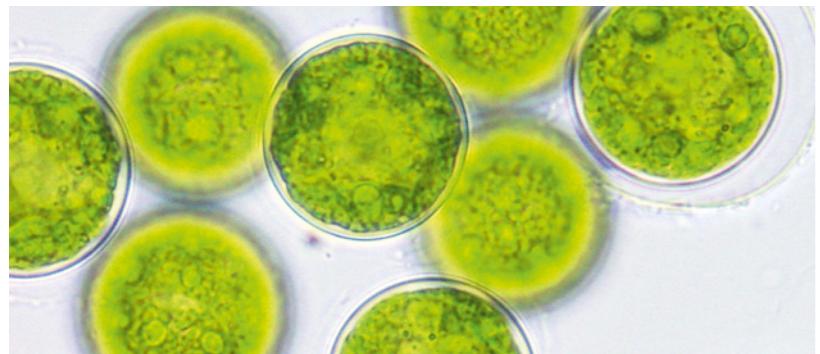


## Closed system

Closed systems are dominated by tubular and flat-plate reactors. Other options are bags, coils or domes. Flat plate systems have received a lot of attention due to their large illuminated surface area, but the technology suffers from heating problems and a strong tendency to build up biofilm formations on the inner walls. Tubular systems on the other hand reduce these drawbacks while maintaining the advantages of optimal light input and high productivity.

Therefore closed tubular glass Photobioreactors (PBRs) with long lifetimes and easy cleanability, are very well suited for the highly reproducible cultivation of algae resulting in the highest possible growth rates. As such, tubular glass PBRs are best suited to provide biosecurity for high quality inoculum used in open ponds.

## Open ponds


Open ponds are typically built in circular or raceway configurations. The water is kept in motion, for example by paddle wheels. Open ponds are seemingly inexpensive and easy to build. However, poor light utilization, danger of contamination and high water evaporation are the main challenges, which lead to low biomass output per area and large water uptake. Some difficulties can be overcome by rooftops however this increases the costs further.

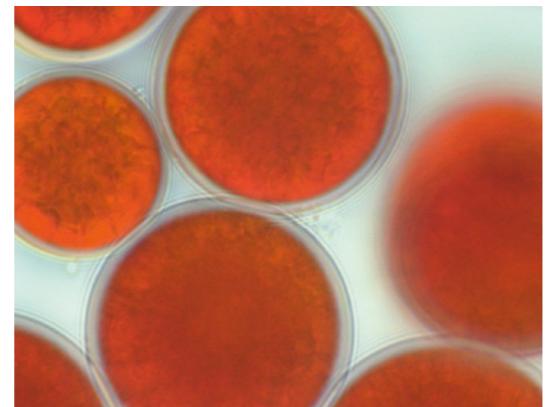

Upper photo  
*Haematococcus pluvialis*, green phase

Lower photo  
*Haematococcus pluvialis*, red phase

Right  
© Algalif Iceland ehf.

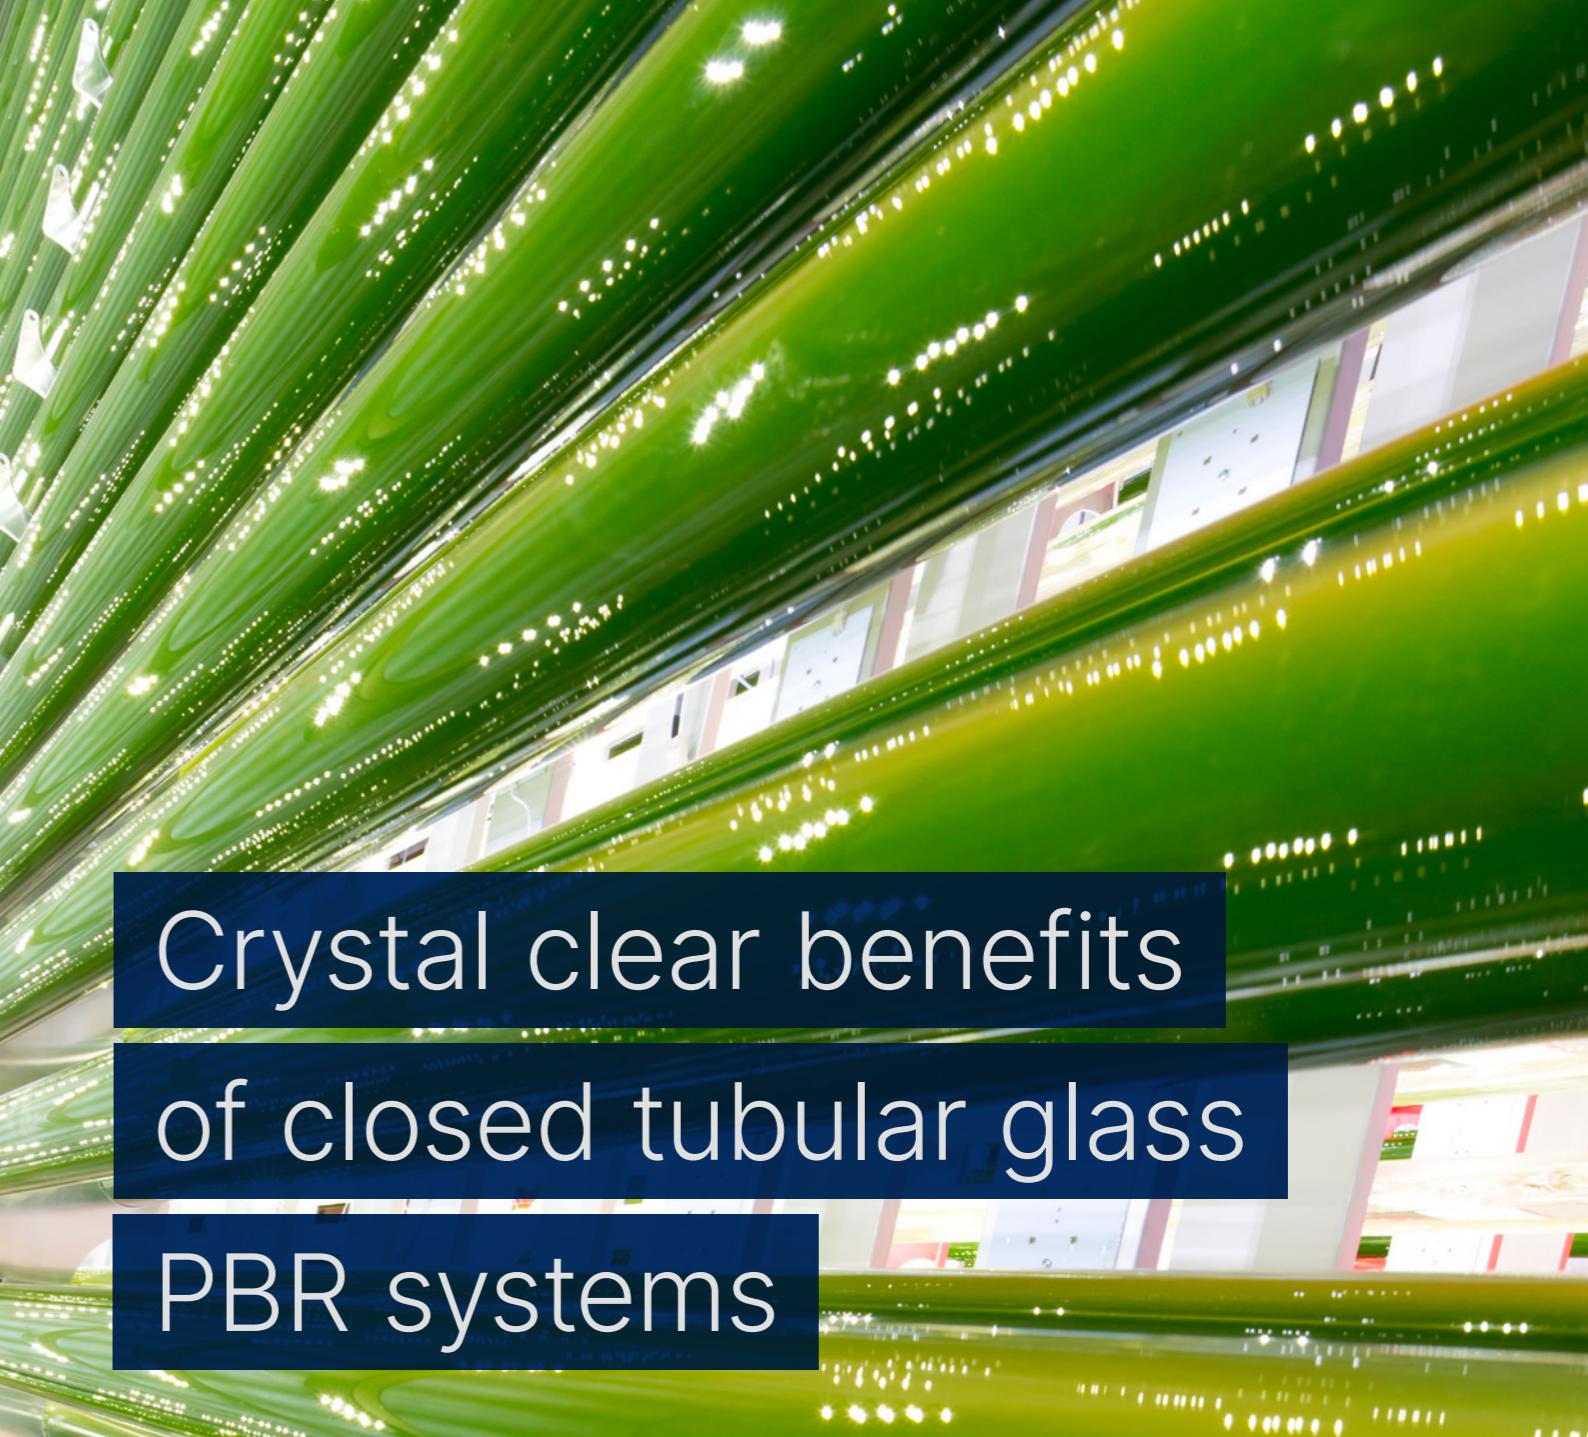

## Crystal clear benefits

## of closed tubular glass

## PBR systems



### Biosecure

protection against bio-contamination and culture crashes



### Cost efficient

little maintenance and low total cost of ownership



### Resistant

against chemicals, corrosion, sagging, scratches, UV-light



### Productive

80 – 160 l/m<sup>2</sup> photoactive volume, PBR height up to 6 m



### Durable

sustainable light transmission T > 95 % (air – glass – water), lifetime of 50 years and more




### Food safe

food and pharma grade

# Overview


## Helical system

- 1 U-bend
- 2 Coupling
- 3 Tubing

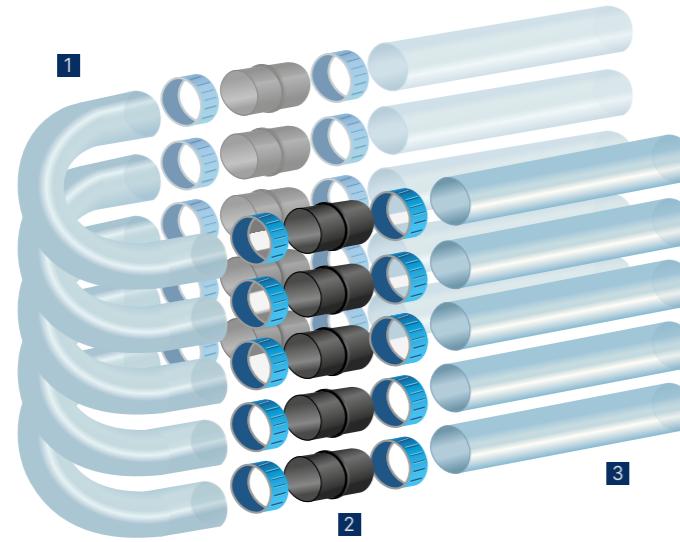


## Fence system

- 1 Manifold
- 2 Coupling
- 3 Tubing

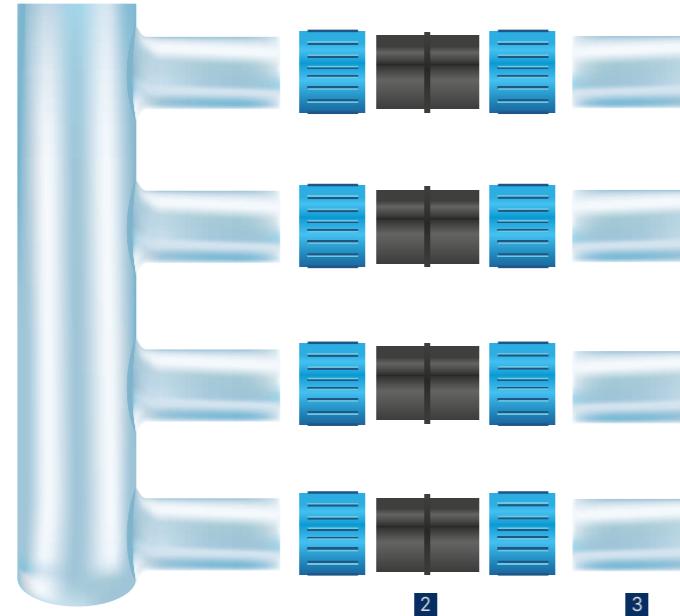

horizontal  
or vertical  
orientation

# Borosilicate glass tubing

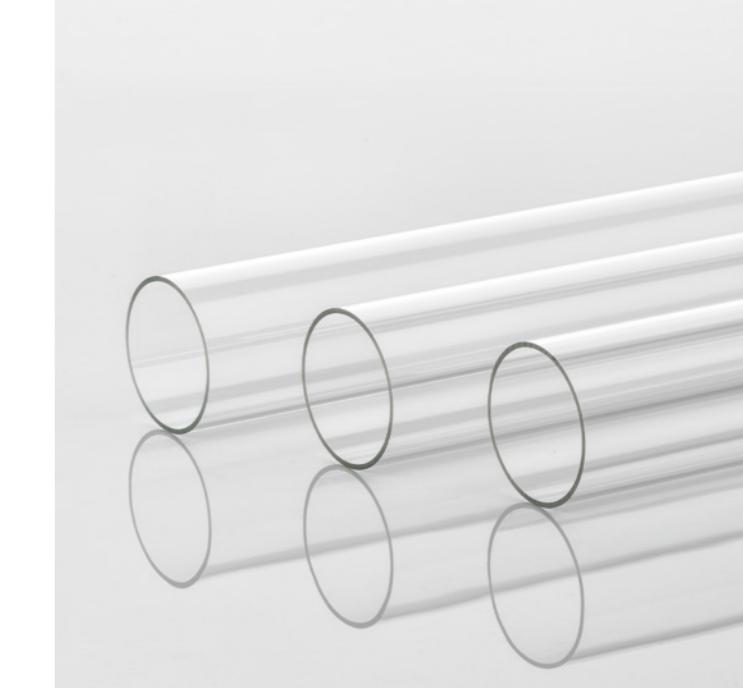

Item no.	Joint outside diameter mm in	Joint wall thickness mm in	Tube length m ft	Volume per tube l gal	Package type*	Package content
1535285			1.4 4.6	2.79 0.74	carton	9
					pallet	180
1522883	54 ± 0.65 2.13 ± 0.03	1.8 ± 0.18 0.07 ± 0.01	2.5 8.2	4.99 1.32	carton	12
					pallet	144
1523124			5.5 18	10.97 2.90	wooden box	56
					pallet	238
1534297			1.4 4.6	4.04 1.07	carton	9
					pallet	180
1500383			1.4 4.6	7.21 1.90	carton	9
					pallet	108
1511901	65 ± 0.65 2.56 ± 0.03	2.2 ± 0.18 0.09 ± 0.01	2.5 8.2	21.8 48.0	wooden box	36
					pallet	165
1459938			5.5 18	15.86 4.19	wooden box	36
					pallet	1935.5
1534302			1.4 4.6	19.7 43.5	carton	9
					pallet	236.4 522

\*for explanation regarding package type please see page 12

Other dimensions upon request.

Glass tubing for algae cultivation must be stored in dry conditions in closed buildings. For storing pallets and wooden boxes with glass tubing, the floor must be level and horizontal and have a load-bearing capacity of 1,000 kg/m<sup>2</sup>. Do not stack more than 3 pallets on top of each other.

# Borosilicate glass U-bends



## Helical system



© Algalif Iceland ehf.

Item no.	Joint outside diameter	Joint wall thickness	Joint U-bend width	Approx. U-bend height	Straight side length	Volume per bend (approx.)	Package type	Package content
1534644	54 ± 0.65 2.13 ± 0.02	2.5 ± 0.20 0.10 ± 0.01	234 ± 2.00 9.21 ± 0.08	200 7.87	> 45 > 1.77	0.85 0.22	carton pallet	33 396
1436672	65 ± 0.65 2.56 ± 0.03	2.8 ± 0.20 0.11 ± 0.01	245 ± 2.00 9.65 ± 0.08	200 7.87	> 45 > 1.77	1.2 0.32	carton pallet	21 252

Glass U-bends for algae cultivation must be stored in dry conditions in closed buildings.

# Borosilicate glass manifolds



## Fence system



Manifolds and couplings, fence system. © Jongerius ecoduna GmbH


Manifolds are placed at the tops or at the ends of tubular PBR fences and function as U-bends and in- and outlets.

- Biosecure and food safe, full glass solution
- Available with closed ends or with flange
- Outside diameter of arms: 54 mm or 65 mm for use with standard couplings
- Number of arms, distance between arms, total length etc. are customized with a minimum order quantity of 25 pieces


Description*	Package	Package content	Minimum order quantity (MOQ)
Manifolds 10 arms closed 54 mm			25
Manifolds 5 arms flange 54 mm			25
Manifolds 8 arms closed 65 mm			25
Manifolds 4 arms flange 65 mm			25
Manifolds 6 arms open 65 mm	carton pallet	2 36	1 pallet

\*closed: both ends closed; flange: one side closed and one side flange; open: both sides flange  
Glass manifolds for algae cultivation must be stored in dry conditions in closed buildings.


# Couplings

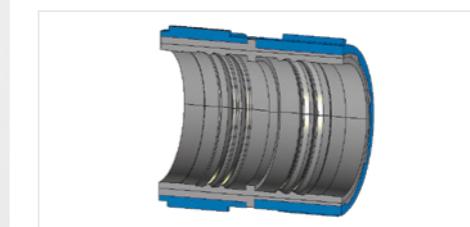


**1 Standard, length 80 mm**  
Partition wall to assure glass separation and smooth transition (torque wrench 40 Nm needed)

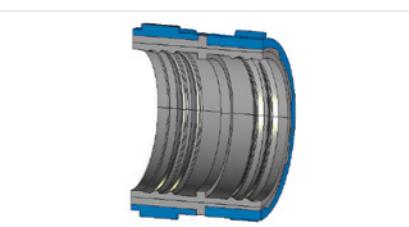

**2 Standard slim, length 45 mm**  
(torque wrench 25 Nm needed)

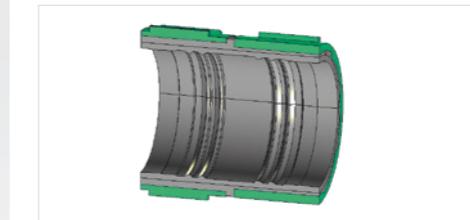

**3 Maintenance, length 80 mm**  
Allows easy exchange of tubes, no partition wall

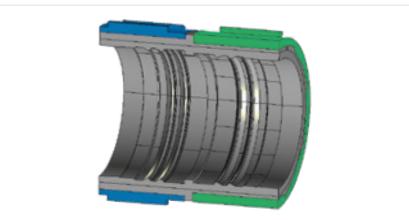

**4 Adapter, length 80 mm**  
Allows connection to periphery tubes with 2.5 in outer diameter



SCHOTT tool kit



Open standard coupling



Open standard slim coupling

Item no.	Outside diameter tube mm   in	Package		Description	Package
		Number of couplings			Weight approx. kg approx. lb
1530116	54   2.13	24	bag	Standard <sup>(1)</sup>	6.9   15.3
1581056		960	pallet	Standard slim <sup>(2)</sup>	277.7   612.2
1463260	65   2.56	24	bag	Standard <sup>(1)</sup>	3.0   7.0
1581035		960	pallet	Standard slim <sup>(2)</sup>	226.2   530.8
		24	bag	Standard <sup>(1)</sup>	6.1   13.4
		1824	pallet	Standard slim <sup>(2)</sup>	219.4   483.7
		24	bag	Standard <sup>(1)</sup>	3.2   6.6
		1824	pallet	Standard slim <sup>(2)</sup>	240.8   498.6

**Toolbox 54**  
Standard with torque wrench 40 Nm for closing of coupling and tools for opening

**Toolbox 54**  
Slim with torque wrench 25 Nm for closing of coupling and tools for opening

**Toolbox 65**  
Standard with torque wrench 40 Nm for closing of coupling and tools for opening

**Toolbox 65**  
Slim with torque wrench 25 Nm for closing of coupling and tools for opening

Specially developed for tubular photobioreactors:

The couplings are designed for SCHOTT glass tubes with plain tube ends according to the product range shown in this brochure.

- Proven lifetime > 10 years\*
- 3 bar pressure resistance
- UV-resistance
- Regular cleaning cycles with various chemicals
- Fast installation allowing for reduced built up time of the reactor
- Easy to disassemble and re-use allowing for fast modification or extension of a reactor system
- Easy handling with pre-assembled devices and a special tool kit including a torque wrench (Standard couplings: 40 Nm, Slim couplings 25 Nm)
- Food grade



\*installed in PBR systems since 2014

## Additional equipment

Item no.	Outside diameter tube mm   in	Package		Description	Package
		Number of couplings			Weight approx. kg approx. lb
1530120	54   2.13	4	carton	Maintenance kit (no partition wall) <sup>(3)</sup>	0.9   2.0
1530105	65   2.56	4	carton	Maintenance kit (no partition wall) <sup>(3)</sup>	1.0   2.2
1534828	65   2.56	4	carton	Adapter <sup>(4)</sup>	1.0   2.2

Couplings for algae cultivation must be stored in dry conditions in closed buildings.

# Packaging



## Bags

- Couplings



## Cartons

- Tubes, up to 2.5 m length
- U-bends
- Couplings
- Manifolds



## Wooden boxes and special pallets

- Tubes, 5.5 m length
- Smaller quantities

# Borosilicate glass properties

## DURAN® glass tubing

	Metric	US
Coefficient of mean linear thermal expansion $\alpha$ acc. to DIN ISO 7991	$3.3 \cdot 10^{-6} \text{ K}^{-1}$ (20°C; 300°C)	$3.3 \cdot 10^{-6} \text{ K}^{-1}$ (68°F; 572°F)
Transformation temperature $T_g$	525 °C	977 °F
Density $\rho$ at 25°C	2.23 g · cm <sup>-3</sup>	139.2 lb · ft <sup>-3</sup>
Modulus of elasticity E (Young's modulus)	$63 \cdot 10^3 \text{ N} \cdot \text{mm}^{-2}$	$91 \cdot 10^5 \text{ lb} \cdot \text{in}^{-2}$ (psi)
Poisson's ratio $\mu$	0.20	0.20
Thermal conductivity $\lambda_w$ at 90 °C	1.2 W · m <sup>-1</sup> · K <sup>-1</sup>	0.69 Btu · hr <sup>-1</sup> · ft <sup>-1</sup> · °F <sup>-1</sup>
Refractive index ( $\lambda = 587.6 \text{ nm}$ ) $n_d$	1.473	1.473
Stress-optical coefficient (DIN 52 314) K	$4.0 \cdot 10^{-6} \text{ mm}^2 \cdot \text{N}^{-1}$	$4.0 \cdot 10^{-6} \text{ mm}^2 \cdot \text{N}^{-1}$

Chemical composition	Chemical resistance
SiO <sub>2</sub>	B <sub>2</sub> O <sub>3</sub>
81	13
Na <sub>2</sub> O + K <sub>2</sub> O	Al <sub>2</sub> O <sub>3</sub>
4	2

main components in approx. weight %

DURAN® is a registered trademark of DWK Life Sciences GmbH.




All products from SCHOTT for algae cultivation must be stored in [dry conditions in closed buildings](#). For storing pallets and wooden boxes with glass tubing, the floor must be level and horizontal and have a load-bearing capacity of 1,000kg/m<sup>2</sup>. [Do not stack more than 3 pallets on top of each other.](#)

# Borosilicate glass properties

## DURAN® glass tubing

### Transmission

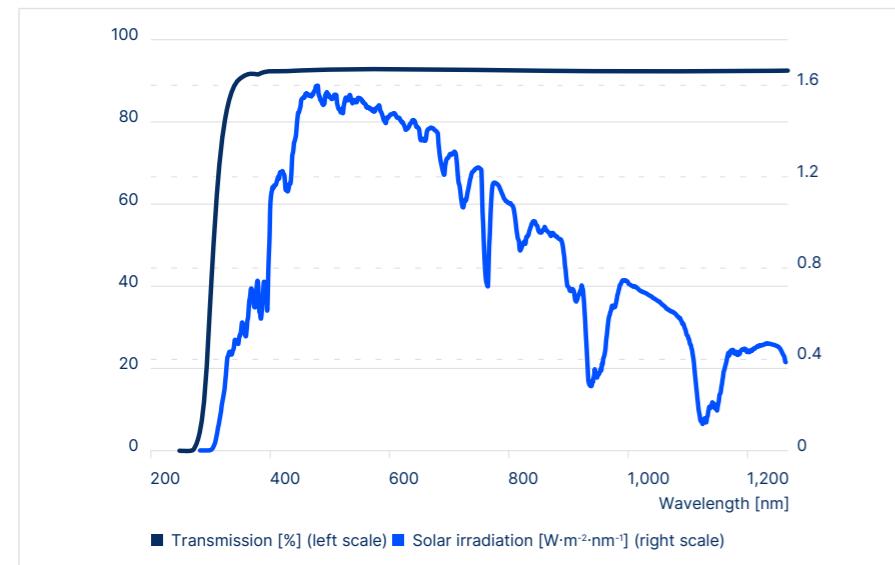

Transmission of DURAN® glass (d = 2.2 mm) in configuration air/glass/air.  
DURAN® is a registered trademark of DWK Life Sciences GmbH.

### Pressure resistance of tubing made of borosilicate glass \*

The following formulas apply to stress free, pristine tubing and cylindrical hollow bodies with a circular profile, uniform wall thickness with open ends, free from thermal load, under internal positive pressure.

#### Estimation of the minimum wall thickness (WT)

$$WT = \frac{OD \cdot p}{140 \text{ bar} + p}$$

$$\frac{K}{S} = 70 \text{ bar}$$

Permissible load referring to standard DIN EN 1595: "Pressure equipment made from borosilicate glass 3.3 – general rules for design, manufacture and testing"

#### Estimation of the maximum pressure resistance (p)

$$p = \frac{WT \cdot 140 \text{ bar}}{OD - WT}$$

OD = Outside Diameter in [mm]

WT = Wall Thickness in [mm]

p = Pressure Resistance in [bar]

#### Other points to be considered:

- AD 2000-leaflet N 4, edition 2000-10: Pressure vessels made of glass, with encl. 1, edition 2000-10: evaluation of faults in walls of glass pressure containers
- AD 2000-leaflet B 1, edition 2000-10: cylindrical and spherical shells under internal pressure overload

According to DIN EN 1595: "Pressure equipment made from borosilicate glass 3.3 – general rules for design, manufacture and testing", DURAN® approved material and may be used for the construction of pressure equipment.

\*typical values under standard conditions

# Pressure drop in tubular photobioreactors

## Pressure loss \*

In general, the pressure drop can be calculated for any velocity using the following formula.

$$\Delta p = \zeta \cdot \frac{\rho}{2} \cdot u^2$$

$\Delta p$ : pressure loss  
 $\zeta$ : pressure loss number (zeta)  
 $\rho$ : algae culture density  
 $u$ : linear velocity of algae culture

$u = 0,7 \text{ m/s}$	$\zeta$	$\Delta p [\text{Pa}]$
Round tube (D = 65 mm, WT = 2.2 mm, L = 5.5 m)	1.96	480
U-bend (D = 65 mm, WT = 2.8 mm)	0.252	62

Pressure drop of a tube and a U-bend at the given velocity,  $u$ . D is the outer diameter, WT the wall thickness. The algae culture's density was approximated with  $\rho = 1 \text{ g/cm}^3$ .

\*typical values under standard conditions


## Electrical power

The electrical power of the pumps,  $P_{el}$ , scales with the pressure drop and the volume flow, Q:

$$P_{el} = \frac{\Delta p \cdot Q}{\eta_p}$$

$P_{el}$ : electrical power  
 $\Delta p$ : sum of pressure loss in Pa  
 $Q$ : volume flow rate in  $\text{m}^3/\text{s}$   
 $\eta_p$ : pump efficiency at operating point ( $0 < \eta_p < 1$ )

Research done in cooperation with: Institute of Fluid Dynamics, LSTM, Technical Faculty, University Erlangen-Nuremberg, Germany

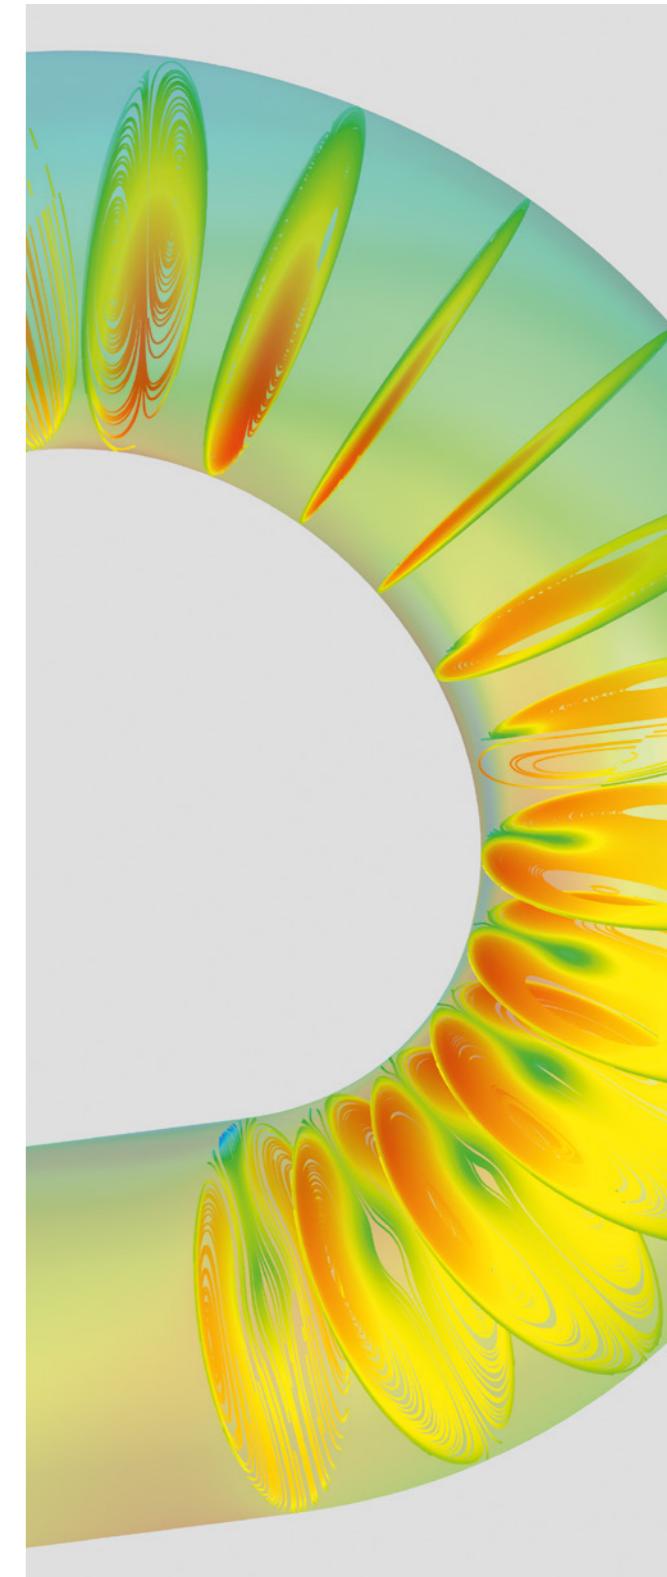

# Features and benefits

## Closed tubular photobioreactors versus open ponds



Closed tubular photobioreactor



Open pond

### Contamination

- Very low risk of contamination compared to open ponds, where other microorganisms or insects have easy access
- No limitation regarding the algae species that can be grown, also due to effective blocking against competing organisms

### Productivity

- Higher productivity in terms of mass per area and day
- Significantly higher volumetric productivity

### Algae concentration at harvest

- Notably higher concentration in terms of mass per liter
- More efficient harvesting procedure

### Water loss

- No evaporation within closed system compared to open ponds, which can lose significant water amounts, resulting in salinization
- Water loss is limited to external factors, such as the cooling process

### Biomass quality

- Biomass quality is highly reproducible due to excellent process control of tubular PBR systems
- High value products or high quality inoculum can be produced with optimum reliability

### Production flexibility

- Easy cleanability allowing for defined initial status any time, thus switching algae species is possible and secure

### Use of GMO\* for improved production process

- GMO production is possible with closed reactor design

\*GMO = Genetically Modified Organism

## Borosilicate glass versus polymer materials

### Light transmission

- Excellent light transmission (see page 14 for details)
- No solarization or browning effect
- No UV-protective additive or coating necessary to secure material properties

### Fire protection

- Glass does not burn or give off toxic fumes

### Leaching

- Glass is a chemically highly resistant material. With plastic tubing, depending on the polymer type, monomers or oligomers of hazardous substances such as Bisphenolmolecules can be leached into the algae culture.

### Cleaning

- Mechanical stability allows continuous in-line cleaning with polymer pellets
- Chemical stability allows cleaning in place (CIP)
- Lower material and maintenance costs compared to quality polymer tubes

### Thermal stability




- No need for expansion loops due to low thermal expansion; Example: For 5.5 m long tubes and a temperature increase of 20 °C/36 °F the expansion of Borosilicate glass is only 0.36 mm/0.01" while polymers expand from 3.3–8.8 mm/0.13"–0.35" depending on polymer type.

### Cost saving

- Glass components can last fifty years and longer
- Reduced number of rack poles. High mechanical stability allows increased support distances without significant sagging of tubes (see picture on right)

### Sagging

- No permanent deformation of glass tubes in contrast to polymer tubes

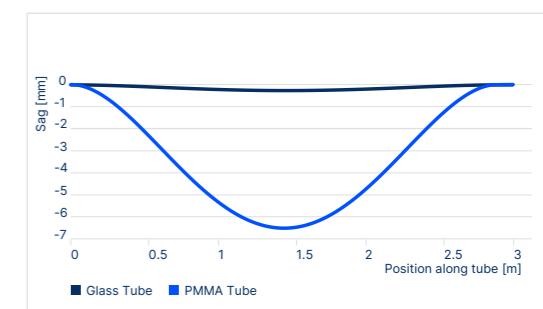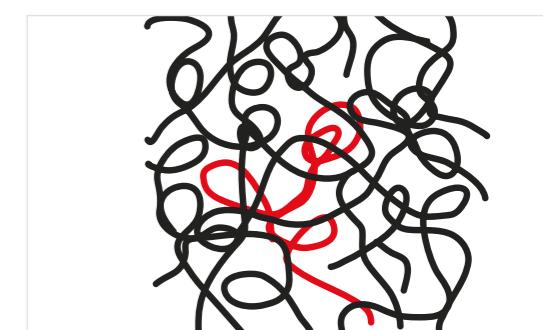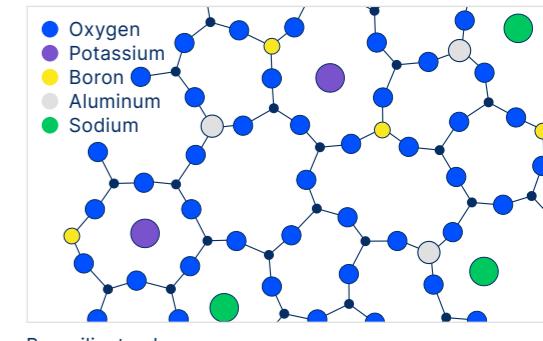

Sagging of water filled tubes (outer diameter 65 mm, wall thickness 2.2 mm, length 2.75 m). The sag of the glass and polymer tubes is 0.5 mm and 6.6 mm, respectively. The polymer tube would need to be supported every 1.5 m for the same sag as the glass tube.

# References of glass tubular photobioreactors

SCHOTT has formed alliances and partnerships all over the world. This allows us to provide complete tubular photobioreactors according to your needs.

Please contact us for further details.

- 1 ©Algalf Iceland ehf., Iceland
- 2 ©Varicon Aqua Solutions Ltd., UK, Phyco-Flow PBR at OP Bio, Japan
- 3 ©A4F-Algae for Future, Portugal
- 4 ©Algatechnologies Ltd., Israel
- 5 ©Lgem AlgaeHUB®, Netherlands
- 6 ©ROHTO, Japan



## Technical performance specification

Detailed information on permissible faults, definition of faults, testing methods and testing units are available upon request. Reduced tolerances are also available upon request. Regarding quality issues the relevant "Technical performance specification" (TPS) for the application apply to all sales and are binding unless separate written agreements with respect to specification have been agreed upon.

SCHOTT® is a registered trademark of SCHOTT AG. DURAN® is a registered trademark of DWK Life Sciences GmbH.

We thank our customers and partners for their kind assistance in providing product samples and photos.

SCHOTT declines any liability with respect to the correctness or completeness of any information or data that is expressly or implicitly contained in this brochure.

All data and descriptions in this brochure are for informational purposes only and do not constitute guaranteed properties or warranties. Actual performance depends on operating conditions. Subject to change without notice.



Germany:  
Site Mitterteich + Mainz



India:  
Site Baroda



Brazil:  
Site Rio de Janeiro



China:  
Site Jinyun

[schott.com](http://schott.com)

SCHOTT AG, Erich-Schott-Strasse 14  
95666 Mitterteich, Germany