

# ColdVision CV-LS LED Light Source

for machine vision applications



The CV-LS light source is the flagship of the SCHOTT ColdVision series, offering high efficiency output in a compact footprint with versatile connectivity. This connectivity makes it ideal for machine vision applications, while the high brightness LED light engine greatly increases light output – far beyond 150 W EKE halogen lamp levels for the cool white model.

## Features

- Internal light feedback stabilization.
- Fast triggered strobe (25µs rise time, 1µs precision).
- Analog and digital remote control: USB (Virtual RS232), RS232, Dual Ethernet, Multiport-Wide range power supply according to international standards.
- Cool White, Warm White, and RGBW models are available.

## Advantages

- All connectors come with retention mechanisms.
- High resistance to vibration and shock.
- ESD immunity.
- Maintenance-free LED engine with 50,000 operating hours.

## Technical Specifications

Color	Wavelength CCT	Light Output <sup>2</sup>	Part No. <sup>1</sup>	Active light guide diameter
Cool White	6000K	1350lm <sup>4</sup>	A20980/6000K	Max. 13 mm / 0.51" inch
Warm White	3000K	900lm	A20980/3000k	
Red Ch.	625nm	130lm	A20980/RGBW	
Green Ch.	530nm	250lm		
Blue Ch.	460nm	70lm		
White Ch.	6300K	400lm		

General		
Dimensions (W x D x H)	(mm) / (inch)	129 x 201 x 59,69 / 5.08" x 7.93" x 2.35"
Weight	(kg) / (lbs)	Approx. 0,816 / 1.8
Cooling		Fan

Electrical		
Operating voltage, frequency		100 – 240 V ~, 50 – 60 Hz
Input voltage	(V)	24
Power consumption	(VA)	max. 120
Protection class power supply		I
Protection class light source		III
Overvoltage category		II
Lamp type		24 High power LED
Lamp lifetime	(h)	50,000 <sup>3</sup>

Certificates	
Conformity	
EMC-class	A

## Accessories:

Power cord 1.8 m	
EU Plug: IEC-C13 to CEE 7/7	H09063.028
US Plug: IEC-C13 to NEMA 5-15	H09063.026
UK Plug: IEC-C13 to BS 1363	H09063.027


Note: country specific power cord must be ordered separately!

1 Full part numbers will also specify power supply cord type.  
 2 Measured using a SCHOTT fiber optic light guide, Ø 13 mm active, length 1 m (A08051.40 bundle), 23C ambient, typical output  
 3 max. decline of light output to 70% of origin level  
 4 Default Setting 1100lm


We provide a variety of accessories for our ColdVision Series.  
 For details; please refer to our system diagrams or according datasheets.




## Dimensions

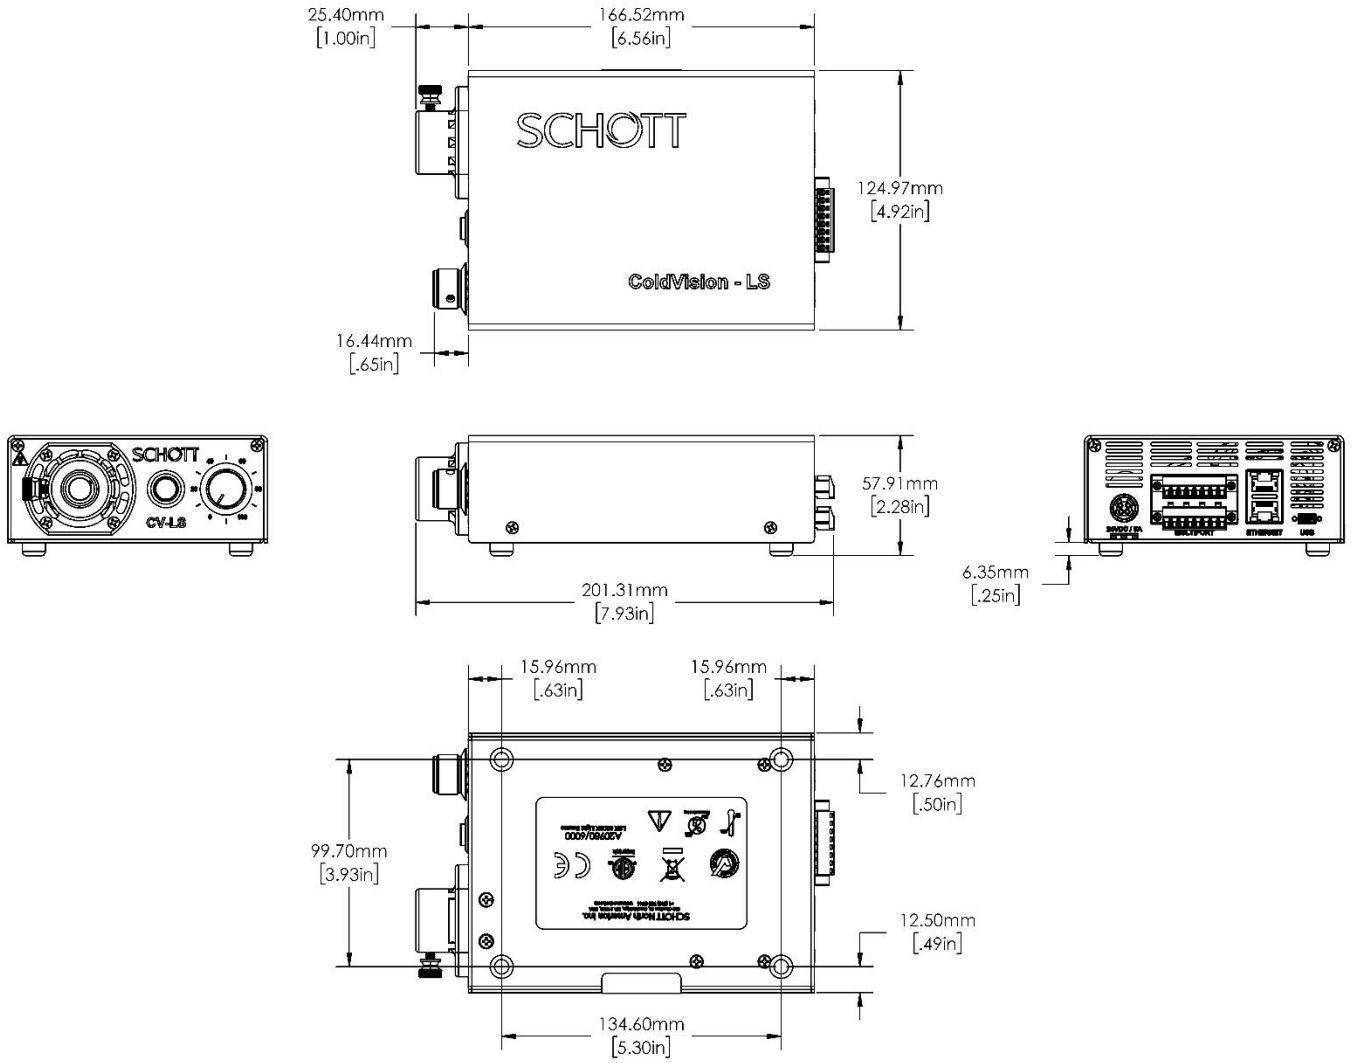

### Relative Optical Spectrum of CV-LS vs Halogen Light Sources

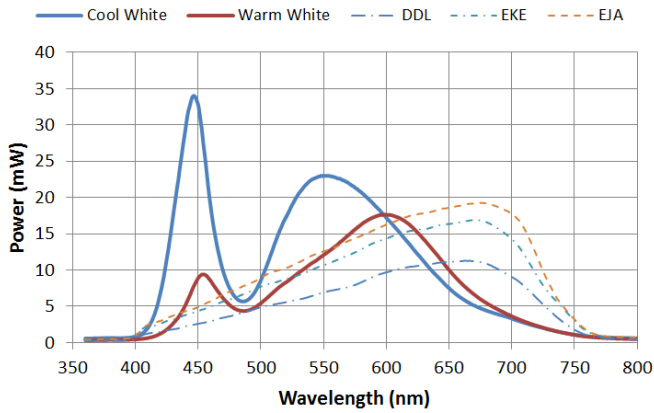

### RGBW Optical Spectrum

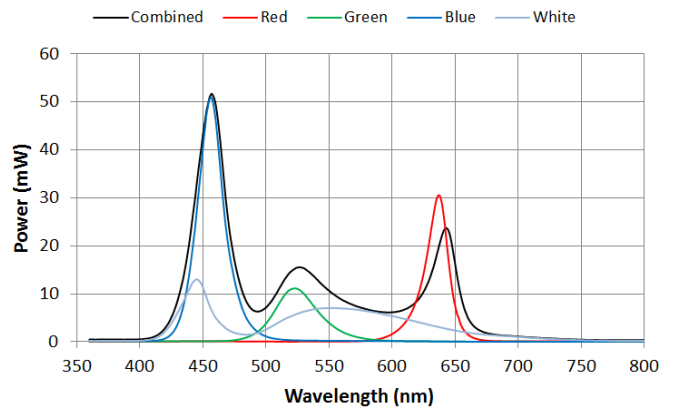

All specifications are subject to change without prior notice. This datasheet or any extracts thereof may only be used in other publications with express permission of SCHOTT. © SCHOTT AG

[schott.com](http://schott.com)

SCHOTT AG, 122 Charlton Street, Southbridge, MA 01550, USA  
Phone: +1-508-765-3211, [info.microscopy@us.schott.com](mailto:info.microscopy@us.schott.com)

**SCHOTT**  
glass made of ideas