

## KG1

Optical properties	
<b>Reflection factor</b>	
$P_d = 0,920$	
<b>Spectral values guaranteed</b>	
$\tau_i$ (365 nm)	$\geq 0,89$
$\tau_i$ (500 nm)	$\geq 0,92$
$\tau_i$ (600 nm)	$\geq 0,88$
$\tau_i$ (700 nm)	$\leq 0,68$
$\tau_i$ (800 nm)	$\leq 0,33$
$\tau_i$ (900 nm)	$\leq 0,1$
$\tau_i$ (1060 nm)	$\leq 0,02$
$\tau_i$ (2200 nm)	$\leq 0,06$
<b>Refractive indices</b>	
$n_F$ (486 nm)	$= 1,516$
$n_e$ (546 nm)	$= 1,513$
$n_d$ (587,6 nm)	$= 1,511$
<b>Sellmeier coefficients</b>	
valid from 400 nm to 1550 nm	
$B_1$	0,3376
$B_2$	0,9188
$B_3$	1,8816
$C_1$	3,461E-03 $\mu\text{m}^2$
$C_2$	9,9076E-03 $\mu\text{m}^2$
$C_3$	181,405 $\mu\text{m}^2$
<b>Internal quality</b>	
Bubble class	3


Mechanical properties	
<b>Reference thickness</b>	
$d = 2,00$ mm	
<b>Density</b>	
$\rho = 2,52$ g/cm <sup>3</sup>	
<b>Knoop hardness</b>	
HK[0.1/20] = 456	

Thermal properties	
<b>Transformation temperature</b>	
$T_g = 599$ °C	
<b>Thermal expansion in</b> $10^{-6}/\text{K}$	
$\alpha$ (-30°C/+70°C)	= 5,3
$\alpha$ (20°C/300°C)	= 6,1


Chemical properties	
<b>Chemical resistance</b>	
FR class	= 0
SR class	= 2
AR class	= 3
<b>Resistance against humidity</b>	
Delicate glass	
see pocket catalogue "Optical Filter Glass 2024", chapter 5.5	

Colorimetric properties				
	1 mm	2 mm	3 mm	
Illuminant D65	x	0,311	0,309	0,307
	y	0,330	0,331	0,332
	Y	88,7	85,6	82,6
	$\lambda_d$	497 nm	497 nm	498 nm
	$P_e$	0,006	0,013	0,018
Illuminant A	x	0,444	0,441	0,438
	y	0,409	0,411	0,413
	Y	88,4	84,9	81,6
	$\lambda_d$	505 nm	505 nm	505 nm
$P_e$	0,007	0,014	0,021	

Notes	
<b>UV</b>	Transmission changes are possible under the action of intense ultraviolet radiation.
Ionically colored glass	
Shortpass filter	
Heat protection filter	
ISO 23364:2021	
Disclaimer	
All data without tolerances are to be understood to be reference values.	

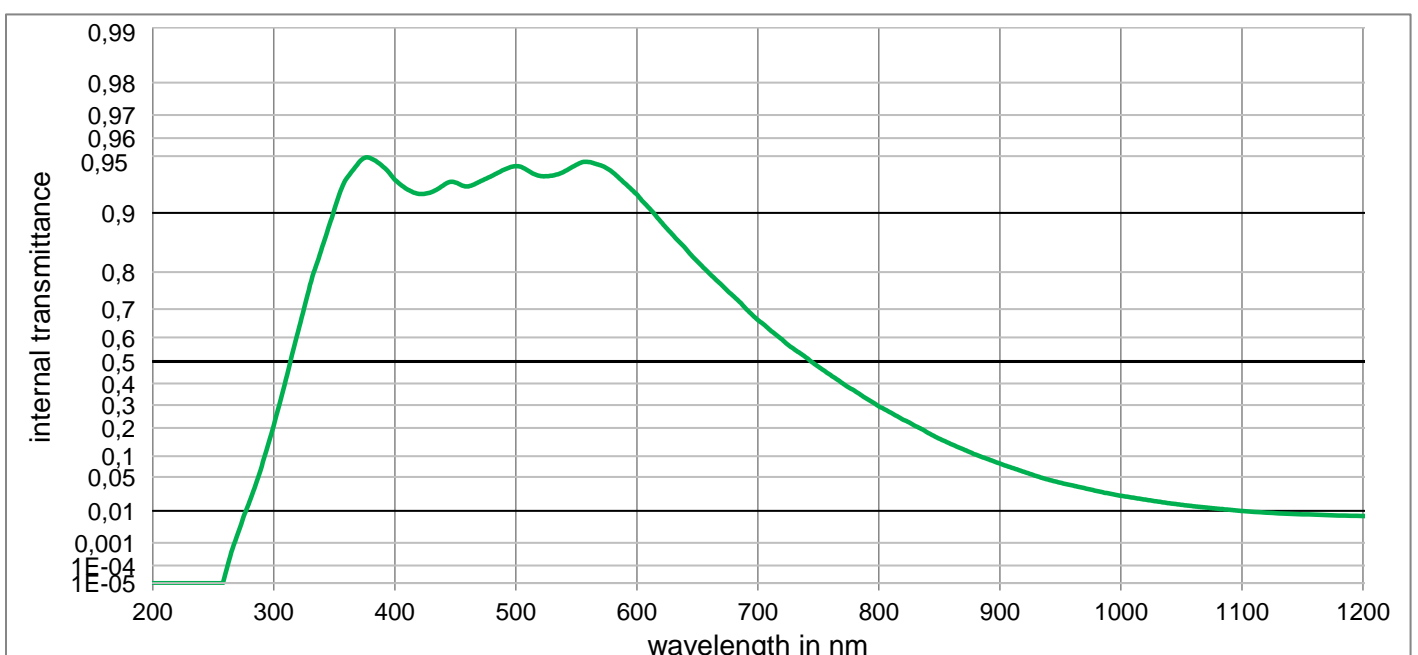

## KG1

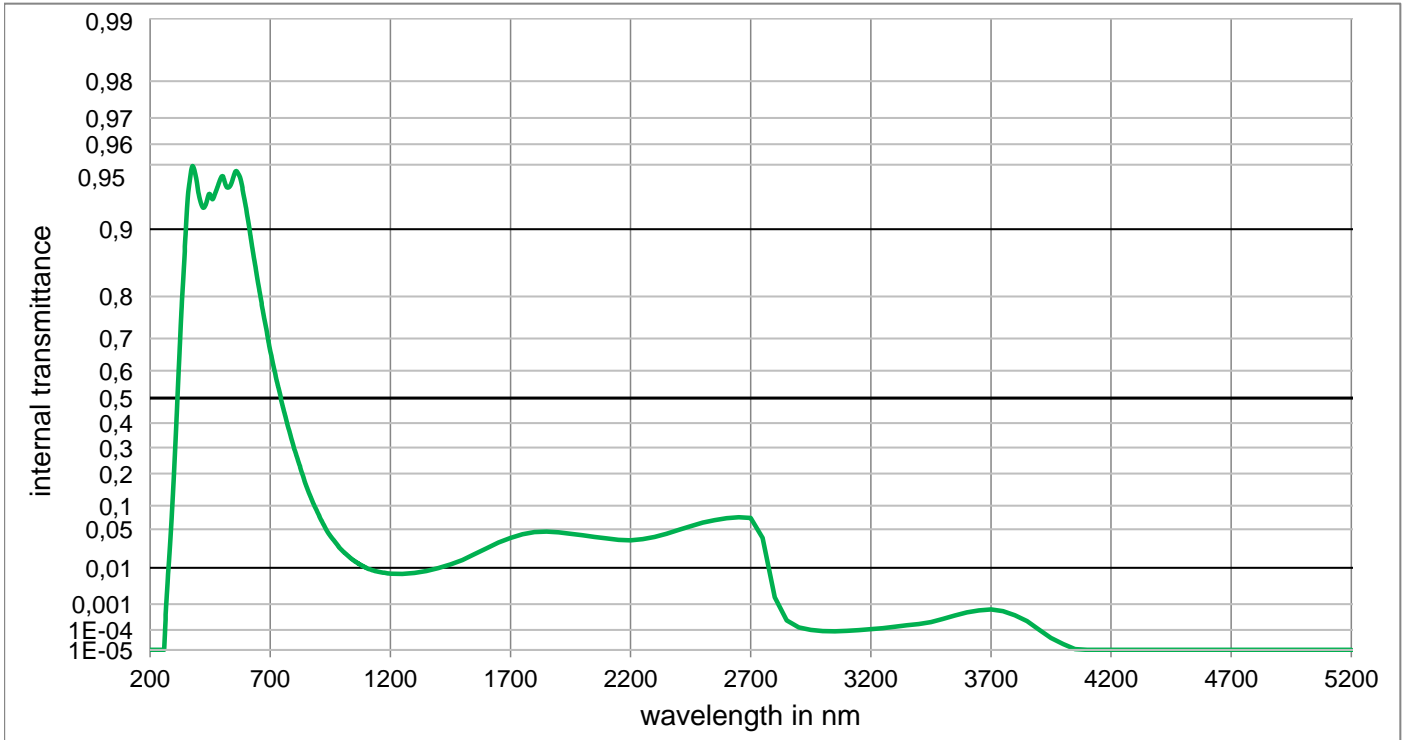

**Internal transmittance  $\tau_i$  at reference thickness**  
 The internal transmittance values, tabulated and graphically represented, are reference values only

$\lambda$ /nm	$\tau_i$	$\lambda$ /nm	$\tau_i$	$\lambda$ /nm	$\tau_i$	$\lambda$ /nm	$\tau_i$	$\lambda$ /nm	$\tau_i$	$\lambda$ /nm	$\tau_i$
200	< 1,000E-05	500	9,434E-01	800	2,936E-01	1100	9,948E-03	2200	3,377E-02	3700	6,632E-04
210	< 1,000E-05	510	9,402E-01	810	2,650E-01	1110	9,410E-03	2250	3,523E-02	3750	5,698E-04
220	< 1,000E-05	520	9,362E-01	820	2,349E-01	1120	8,986E-03	2300	3,829E-02	3800	3,991E-04
230	< 1,000E-05	530	9,364E-01	830	2,082E-01	1130	8,642E-03	2350	4,292E-02	3850	2,350E-04
240	< 1,000E-05	540	9,395E-01	840	1,824E-01	1140	8,360E-03	2400	4,886E-02	3900	1,033E-04
250	< 1,000E-05	550	9,444E-01	850	1,581E-01	1150	8,157E-03	2450	5,536E-02	3950	4,236E-05
260	3,483E-05	560	9,463E-01	860	1,377E-01	1160	7,950E-03	2500	6,181E-02	4000	2,104E-05
270	2,000E-03	570	9,440E-01	870	1,206E-01	1170	7,750E-03	2550	6,692E-02	4050	1,117E-05
280	1,701E-02	580	9,389E-01	880	1,047E-01	1180	7,580E-03	2600	7,069E-02	4100	< 1,000E-05
290	7,300E-02	590	9,302E-01	890	9,150E-02	1190	7,453E-03	2650	7,279E-02	4150	< 1,000E-05
300	2,100E-01	600	9,199E-01	900	7,971E-02	1200	7,350E-03	2700	7,150E-02	4200	< 1,000E-05
310	4,189E-01	610	9,060E-01	910	6,939E-02	1250	7,200E-03	2750	3,692E-02	4250	< 1,000E-05
320	6,222E-01	620	8,887E-01	920	6,017E-02	1300	7,570E-03	2800	1,650E-03	4300	< 1,000E-05
330	7,690E-01	630	8,693E-01	930	5,187E-02	1350	8,490E-03	2850	2,541E-04	4350	< 1,000E-05
340	8,500E-01	640	8,481E-01	940	4,499E-02	1400	9,840E-03	2900	1,282E-04	4400	< 1,000E-05
350	9,040E-01	650	8,230E-01	950	3,971E-02	1450	1,182E-02	2950	9,931E-05	4450	< 1,000E-05
360	9,340E-01	660	7,970E-01	960	3,543E-02	1500	1,472E-02	3000	8,892E-05	4500	< 1,000E-05
370	9,456E-01	670	7,690E-01	970	3,157E-02	1550	1,909E-02	3050	8,612E-05	4550	< 1,000E-05
380	9,487E-01	680	7,380E-01	980	2,790E-02	1600	2,463E-02	3100	9,044E-05	4600	< 1,000E-05
390	9,433E-01	690	7,020E-01	990	2,477E-02	1650	3,097E-02	3150	9,750E-05	4650	< 1,000E-05
400	9,330E-01	700	6,640E-01	1000	2,230E-02	1700	3,707E-02	3200	1,074E-04	4700	< 1,000E-05
410	9,251E-01	710	6,280E-01	1010	2,029E-02	1750	4,196E-02	3250	1,208E-04	4750	< 1,000E-05
420	9,205E-01	720	5,921E-01	1020	1,846E-02	1800	4,558E-02	3300	1,397E-04	4800	< 1,000E-05
430	9,222E-01	730	5,530E-01	1030	1,677E-02	1850	4,635E-02	3350	1,594E-04	4850	< 1,000E-05
440	9,284E-01	740	5,170E-01	1040	1,525E-02	1900	4,488E-02	3400	1,805E-04	4900	< 1,000E-05
450	9,309E-01	750	4,770E-01	1050	1,404E-02	1950	4,284E-02	3450	2,178E-04	4950	< 1,000E-05
460	9,274E-01	760	4,393E-01	1060	1,300E-02	2000	4,076E-02	3500	2,881E-04	5000	< 1,000E-05
470	9,315E-01	770	4,012E-01	1070	1,212E-02	2050	3,830E-02	3550	3,919E-04	5050	< 1,000E-05
480	9,362E-01	780	3,658E-01	1080	1,133E-02	2100	3,616E-02	3600	5,113E-04	5100	< 1,000E-05
490	9,408E-01	790	3,290E-01	1090	1,062E-02	2150	3,447E-02	3650	6,113E-04	5150	< 1,000E-05